

LIGHT-INDUCED MOTION OF MICROENGINES BASED ON MICROARRAYS OF TiO₂ NANOTUBES

V. Ciobanu¹, M. Guix², M. Enachi^{1,*}, V. Postolache¹, V. M. Fomin²,
O. G. Schmidt², and I. Tiginyanu¹

¹National Center for Materials Study and Testing, Technical University of Moldova,
Chisinau, Moldova

²IFW Dresden, Institute for Integrative Nanoscience, Dresden, Germany

*E-mail: enachem2002@yahoo.com

In this work, we demonstrate that TiO₂ micro/nanotubular structures, fabricated by means of electrochemical anodization of Ti sheets, can act as self-propelled microengines when they are exposed to UV irradiation. Single nanotubes with conical internal shape with inner diameter varying from 50 to 120 nm and clusters of TiO₂ nanotubes represented in figure 1, show propulsion through liquid consisting of oxygen peroxide and pure water. When exposed to UV-light, the microarrays of TiO₂ nanotubes exhibiting conical internal shapes show directed motion in confined space as it is indicated in figure 2d.

This light-induced motion of micro/nanoengines can be attributed to diffusiophoresis and localized nanobubble generation inside of the tubes due to the photocatalytic reactions occurring at the huge inner surface inherent to arrays of TiO₂ nanotubes. [1] The intensity of the UV light will influence the chemical reaction speed and therefore the micro/nanoengines motion speed too (figure 2a-c,e).

Depending on the postfabrication annealing conditions, different crystalline phases of TiO₂ nanotubes are obtained. The anatase crystalline phase, is the most photocatalytically active [2], therefore, the efficiency of microengines consisting of TiO₂ anatase phase nanotubes is the best one. Controlled pick-up, transport, and release of individual and agglomerated particles are demonstrated using the UV light irradiation of microengines. Due to the biocompatibility of TiO₂, these micro-nanoengines find great potential in biomedical applications, for instance, they can act as drug delivery system. [3]

The work has been supported by the bilateral BMBF-ASM Grant No. 01 DK13010 TiNaTEng and ASM Grant No. 15.817.02.29A.

- [1] F. Mou, Y. Li, C. Chen, W. Li, Y. Yin, H. Ma, J. Guan, *Small* 2015, 11, 2564. [2] M. Paulose, O. K. Varghese, G. K. Mor, C. A. Grimes, K. G. Ong, *Nanotechnology* 2006, 17, 398
[3] W. Gao, R. Dong, S. Thamphiwatana, J. Li, W. Gao, L. Zhang, J. Wang, *ACS Nano* 2015, 9, 117.

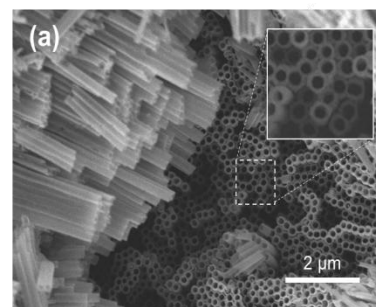


Figure 1 SEM image of a microarray of TiO₂ nanotubes

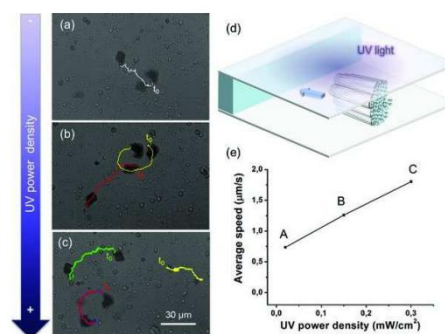


Figure 2 Optical images (a, b, c) of a microarray of TiO₂ nanotubes moving under the UV illumination (d), along with the corresponding tracking (starting point is labeled by t₀). The average speed associated to the aforementioned tracks is represented in panel (e). The power density of the UV irradiation constitutes (a) 0.02 μW/cm², (b) 1.5 μW/cm², (c) 0.3 μW/cm².